


## Pi v2 LCD Keypad Case assembly

**Step 1:** remove the bottom of the case by sliding it off and ensure that the buttons are installed in the button holes. If your electronics are already assembled separate your LCD keypad PCB from the Pi PCB and remove the SD card from the Pi as well.


**Step 2:** insert the left edge of the LCD keypad PCB into the case as shown:



**Step 3:** seat the LCD keypad PCB all the way to the left (you may need to lift it up slightly to fully seat) and then lower the right side until it clicks into place as shown:

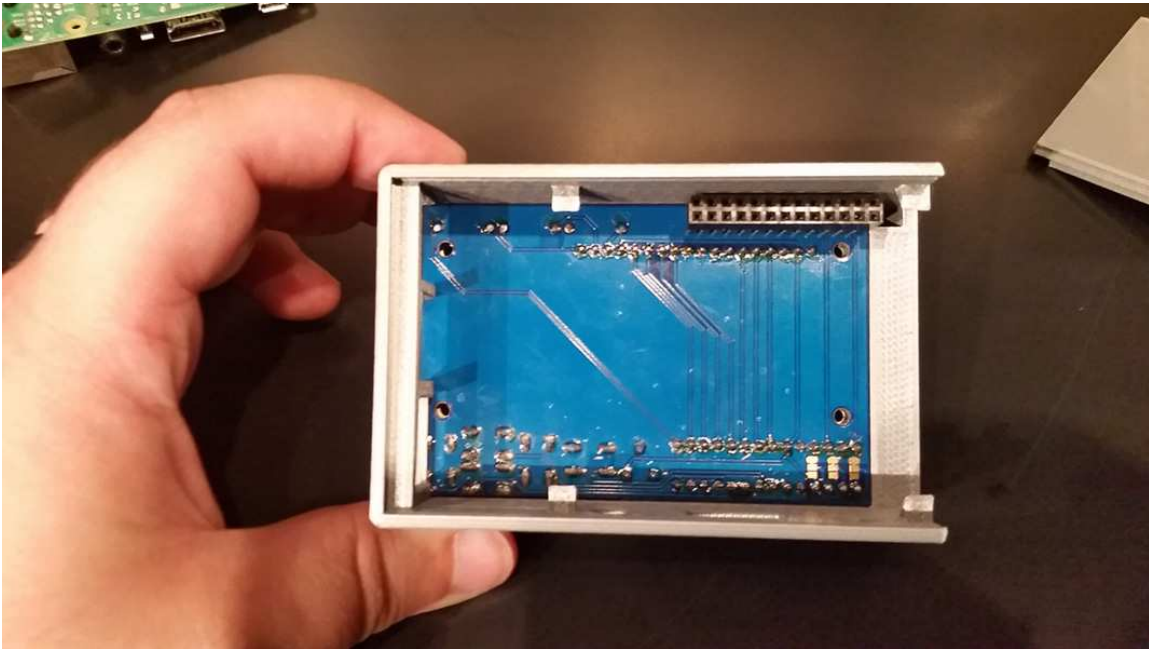

**Step 4:** insert the Pi PCB at an angle such that the HDMI, Audio, and power ports are slotted into their holes first (as shown below). Then lower the top edge of the PCB making sure the pins seat properly into the connector\*.

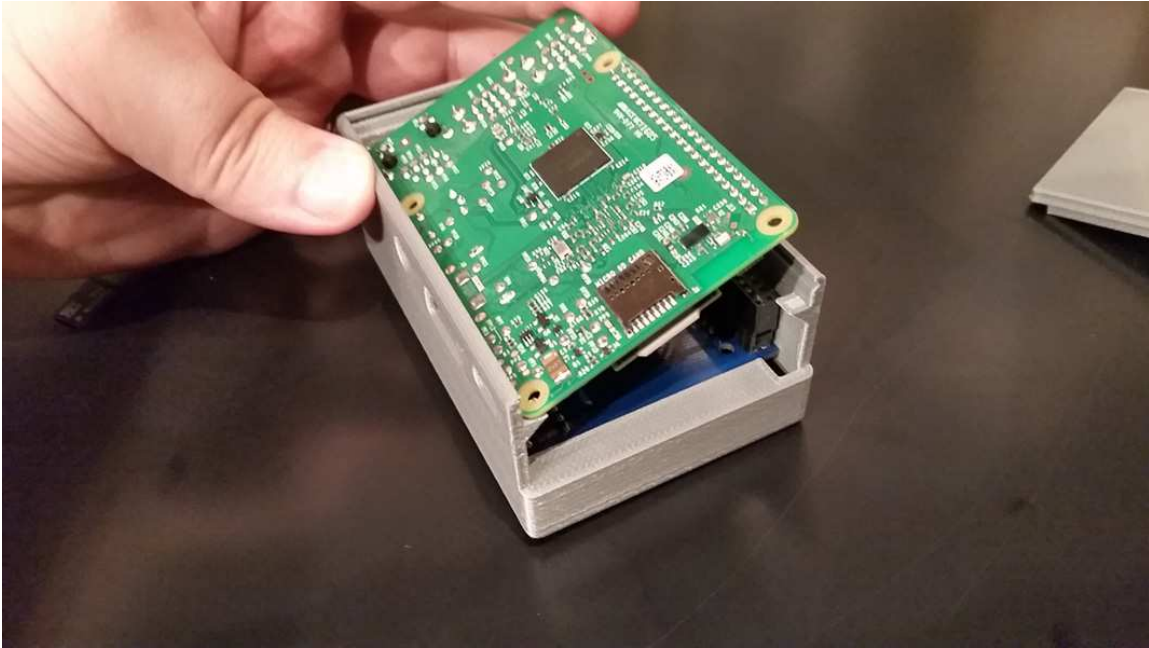

\*NOTE: the corner of the USB ports may rub up against upper case wall and cause some resistance during this step, this is normal.

**Step 5:** slide on the case bottom from the side and push it all the way in until it clicks into place.



**Step 6:** you can now re-install your SD card and begin using your Pi.